


CLASS 3 OR CLASS 2R AGGREGATE BASE,
6" MIN. DEPTH UNLESS OTHERWISE SPECIFIED.
R MIN.=55, SE MIN.=25

SECTION

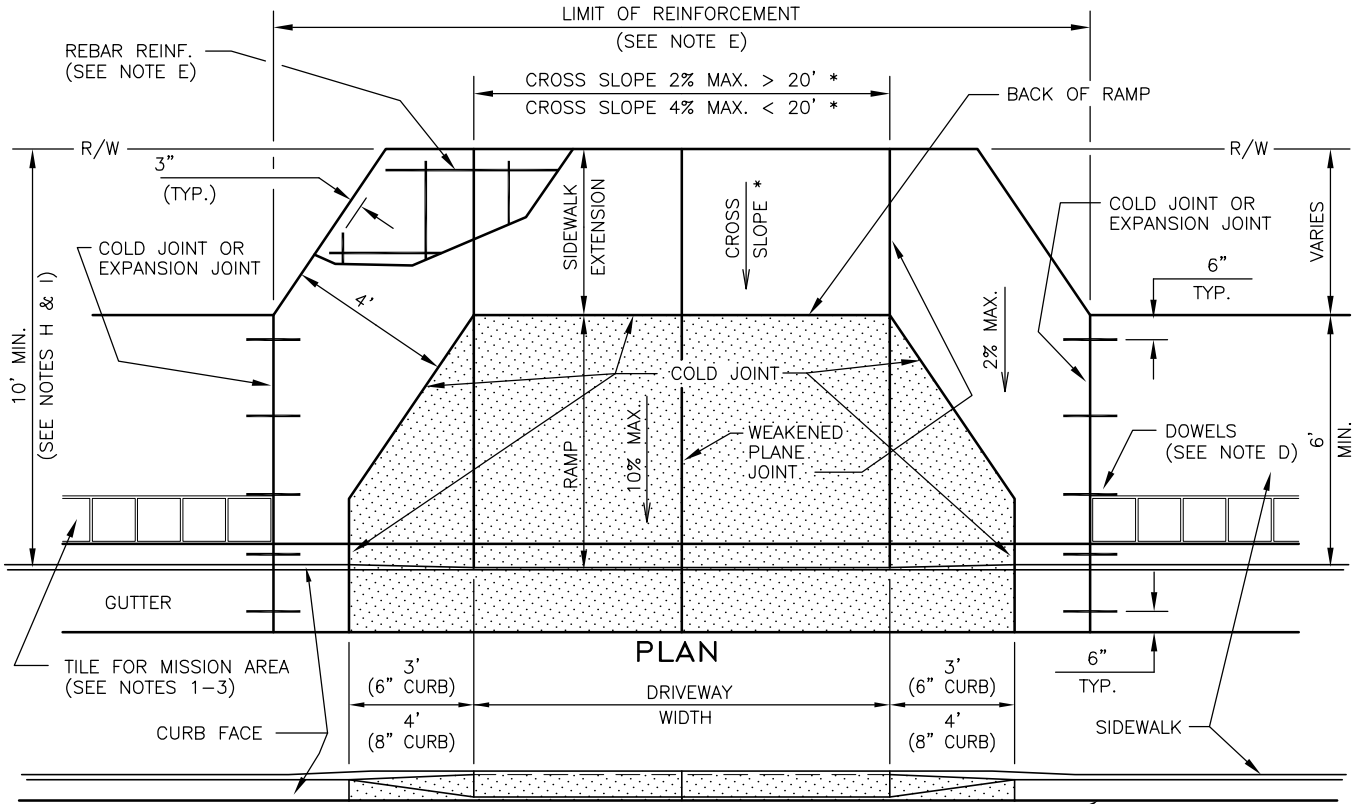

ELEVATION

GENERAL NOTES:

- A. A DEPRESSION IN A NEW CURB AND GUTTER FOR A DRIVEWAY WILL NOT BE PERMITTED UNLESS THE RAMP AND SIDEWALK EXTENSION ARE CONSTRUCTED ALSO.
- B. SLOPE OF RAMP IS A STRAIGHT GRADE FROM THE TOP OF THE BACK OF RAMP TO THE TOP OF THE LIP AT THE GUTTER.
- C. CONCRETE SHALL BE CLASS 3, SLUMP: 2" MIN., 4" MAX.
- D. DOWELS AT EXPANSION, OR COLD JOINT, WITH NEW CONSTRUCTION SHALL BE 1/2" SMOOTH BARS, 15" LONG AT 24" O.C., ONE END SHALL BE SLEEVED OR GREASED.
- E. ALL RAMPS AND SIDEWALK SHALL BE REINFORCED WITH REBAR, #4 @ 24" O.C., CONTINUOUS BOTH WAYS, (REBAR SHALL RUN CONTINUOUS THROUGH COLD OR EXPANSION JOINTS).
- F. COMMERCIAL & INDUSTRIAL DRIVEWAY RAMPS SERVING MORE THAN SIX (6) PARKING SPACES SHALL BE 10' DEEP (LONG) UNLESS OTHERWISE APPROVED BY THE CITY ENGINEER.
- G. SEE ENGINEERING STANDARD #4110 FOR NOTES REGARDING REQUIRED PAVEMENT REMOVAL & REPAIR.
- H. IF DESIGN WILL NOT FIT WITHIN RIGHT-OF-WAY, USE ENGINEERING STANDARD #2111 IF APPLICABLE, WITH APPROVAL OF CITY ENGINEER.
- I. IF RIGHT-OF-WAY IS MORE THAN 10' FROM CURB FACE, BACK OF SIDEWALK EXTENSION SHALL NOT EXTEND BEYOND 10' FROM CURB FACE.

ADD'L NOTES FOR MISSION STYLE AREA: *

- 1. CONCRETE SHALL BE COLORED (DAVIS "ADOBE", #5964) AND SHALL HAVE A SALT FINISH.
- 2. TILE SHALL BE SET IN A MORTAR BED AND SHALL BE FLUSH WITH COVER FRAME AND SIDEWALK.
- 3. NO TILE SHALL BE SET IN MORTAR PRIOR TO APPROVAL OF TILE BY CITY ENGINEER.
- 4. TILE SHALL BE TERRACAL UNGLAZED CERAMIC TILE, MISSION RED, 1 FOOT SQUARE, OR APPROVED EQUAL.
- 5. TILE BAND SHALL TERMINATE, AS SHOWN, ON EITHER SIDE OF DRIVEWAY.
- 6. UTILITY BOXES PER ENG STD. 1010A.

* ADDITIONAL NOTES FOR MISSION STYLE AREA SHALL APPLY IN THOSE AREAS DESIGNATED AS MISSION STYLE SIDEWALK AREA PER CITY COUNCIL RESOLUTION.

| REVISIONS | BY | APP | DATE |
|--------------------------------------|-----|-----|-------|
| Allow Class 2R Base | DVB | BL | 11-08 |
| Eliminate wrapped tile | DVB | BL | 9-06 |
| Add Notes 5 & 6 | DVB | BL | 9-06 |
| STANDARD CURRENT AS OF: January 2010 | | | |



**DRIVEWAY RAMP
STANDARD**